

Full Bezel Add-on Instructions

This document describes how to add a full bezel to a SnapSAN S3000/S5000 disk array or SnapSAN Expansion unit from Overland Storage.

- If adding this bezel during a **new unit installation**, follow the Quick Start Guide and install the bezel clips in place of the ear bezels. Attach the full bezel after the array rack installation is done.
- If adding this bezel to a **previously installed unit**, follow all the instructions in this document.

WARNING: To reduce the risk of electric shock or damage to equipment, always remove any power cords while working with the unit.

AVERTISSEMENT: Pour réduire le risque de choc électrique ou endommagement de l'équipement, retirez toujours les cordons électriques en travaillant avec l'appareil.

CAUTION: While working with the unit, observe standard Electrostatic Discharge (ESD) precautions to prevent damage to micro-circuitry or static-sensitive devices.




Prepare the Unit

Remove Ear Bezels

The SnapSAN disk array has snap-on ear bezels that must be removed:


1. Perform a **normal shutdown** of the disk array.
2. Remove and retain the **four screws** from the front ear flanges securing the array in the rack.
3. Pull the **array** out a couple of inches.
4. Grip **each ear bezel** and pull it sideways to remove it. Bend the top and bottom edges out slightly to release the locking pins.

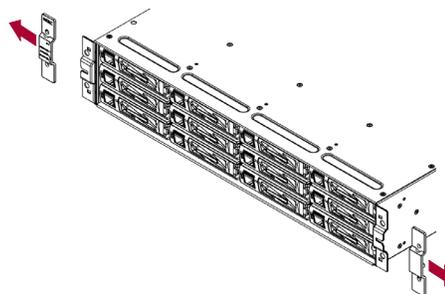

Install New Bezel

Install Bezel Clips

1. Slide the **left clip** (hook type with “L”) onto the left flange until it snaps in place.
2. Slide the **right clip** key (catch type) onto the right flange until it snaps in place.
3. Slide the **array** back into the rack until the flanges contact the rack vertical rails.
4. Using the **four retained screws**, secure the array in the rack.

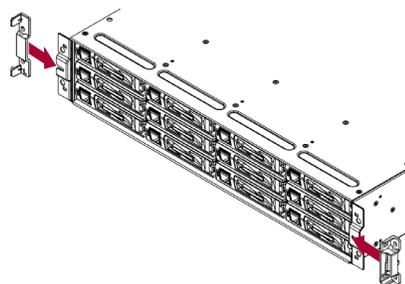


Attach the Bezel

With the SnapSAN in the rack, install the bezel:

1. Unlock the bezel by turning the **key** clockwise to the horizontal position.
2. Catch the **left** side of the front bezel on the hook of the unit's left ear flange.
3. Push in the **right** side until it catches.
4. Lock the bezel by turning the **key** counterclockwise.

The installation is complete and you can restart your SnapSAN.

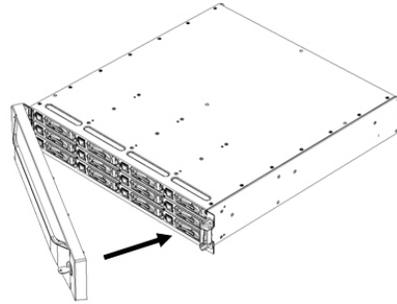

<http://support.overlandstorage.com>

You can get additional technical support on the Internet at the [Overland Storage Support web page](http://support.overlandstorage.com), or by contacting Overland Storage using the information found on the [Contact Us](#) page on our web site.